

Job:  
 Location:  
 Schedule No.:  
 System Designation:

Engineer:  
 Architect:  
 Location:  
 Date:

For:    Reference    Approval    Review    Construction

## Touch Screen Programmable Local Controller

### FEATURES AND FUNCTIONS

- 7" touchscreen with full color LCD display
- Daily, 5+2, 5+1+1, and 7-day scheduling options available with up to 8 actions per day.
- Onboard occupancy sensor
- Relative humidity monitoring and control
- Operation Mode – Cool / Heat / Auto / Dry / Fan
- Fan Speed Control – Auto / Low / Med / High
- Static Pressure Control - ducted indoor units
- Upload custom photo for screen saver display
- Assign indoor unit address designation
- Displays set point, room temperature, mode, louver, swing, and fan speed
- Lockable functions
- Password-protected service menu for installation and configuration
- Built-in USB port to load settings and updates
- °F or °C field selectable - default °F
- Independent heating and cooling set points
- Local unit error display
- Diagnostic service reminders

### WARRANTY

- 1-year limited warranty. \*See warranty for details.

### SPECIFICATIONS

#### PERFORMANCE

Input Voltage (V)	12 VDC
Setpoint Range (or is it)	62°F ~ 86°F
Ambient Temperature Range	23°F ~ 110°F
Ambient Humidity Range (RH)	40% ~ 90%

#### DIMENSIONS

Unit Dimensions (in)	Height	4-7/8
	Width	7-1/8
	Depth	1-1/4


### CABLING

Communication Cabling (not provided)	18 gauge, 4-wire conductor cable (stranded and shielded)
--------------------------------------	--




NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.


**DIMENSIONAL DRAWINGS - INCHES (MM)**

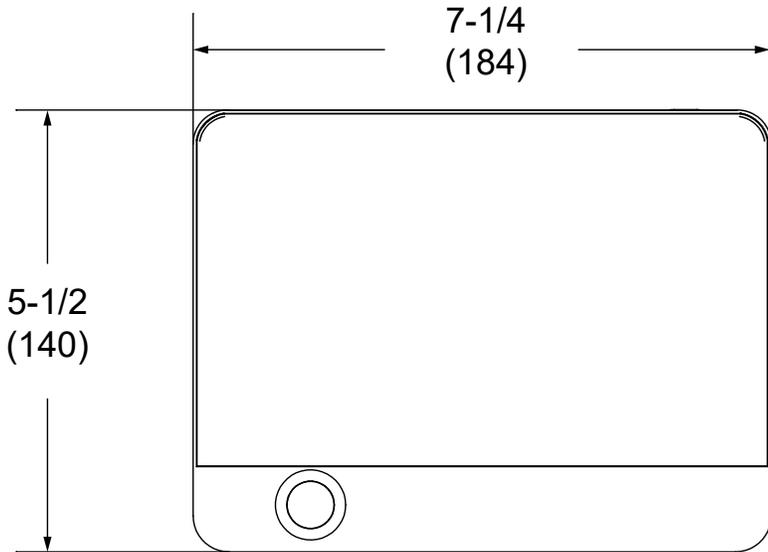

**FRONT VIEW**

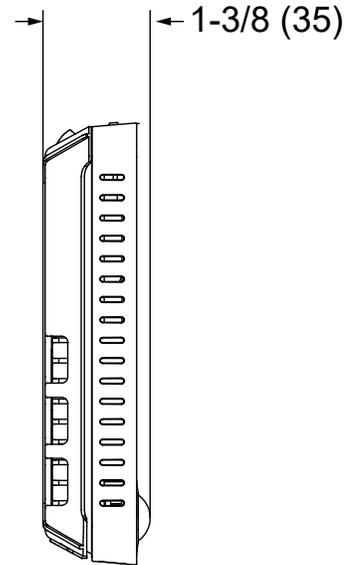

**BOTTOM VIEW**

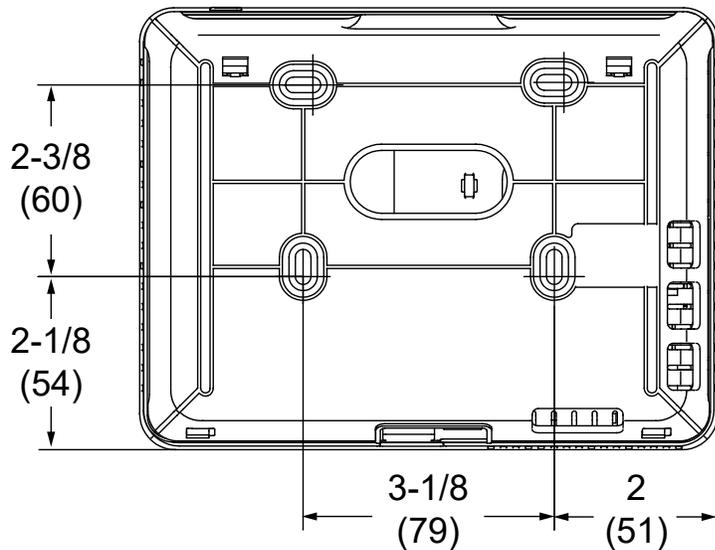

**BACK VIEW**