



SUBMITTAL DATA - CONTROLS

VOSTAT52P-1

VRF HEAT PUMP & HEAT RECOVERY

Job: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Date: _____
 For: Reference Approval Review Construction

Wireless Remote Controller

FEATURES AND FUNCTIONS


- Operation - On/Off
- Operation Mode – Auto / Cool / Dry / Heat / Fan
- Fan Speed – High / Medium / Low
- Air Direction button allows louver angles to be adjusted in preset increments
- °F or °C field selectable – default °F
- Backlit LCD display for easy visibility
- Swing button allows louver adjustment for non-ducted indoor units
- Timer function enables timed on/off operation of indoor unit



SPECIFICATIONS

PERFORMANCE			
Power Supply	2 AAA Batteries (included)		
Setpoint Range	62°F ~ 86°F		
Ambient Temperature Range	23°F ~ 140°F		
Ambient Humidity Range (RH)	40% ~ 90%		
Effective Receiving Range	26ft - 36ft		
DIMENSIONS			
Unit Dimensions (in)	Height	6-1/4	
	Width	2-1/4	
	Depth	3/4	

DIMENSIONAL DRAWINGS

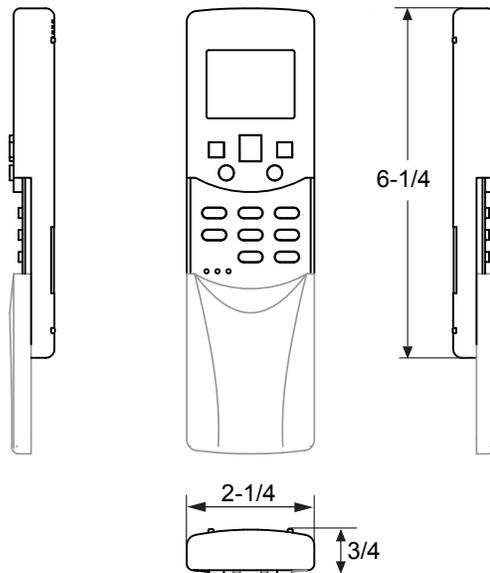

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.